

## Wodoodporna Taśma LED Waterproof flexible LED Ribbon

- 60led/m; 300led/5m
- Kolory: biały, biały ciepły, czerwony, zielony, niebieski, żółty
- ochrona IP64 w elastycznym transparentnym żelu
- 5 metrów na rolce



### Parametry / Specifications

LED Type	3528 SMD LED					
Available Color	R/G/B/Y/W/CW					
Angle(2θ <sub>1/2</sub> )	≥140°					
Luminous Flux (lm)						
Red Light	Green Light	Blue Light	Yellow Light	White Light	Warm White	
330	900	270	300	1500	1500	
Wavelength Scope (nm/K)						
Red Light	Green Light	Blue Light	Yellow Light	White Light	Warm White	
619~635	512~528	463~475	584~595	5500-6500	2700-3500	
LED Qty	300pcs					
Life Span	50, 000h					

CE

RoHS

注意  
谨防静电

### Parametry elektryczne / Electrical parameters

Working Voltage	DC12V					
Power						
RED	GREEN	BLUE	YELLOW	WHITE	Cold White	WARM WHITE
30W	24W	24W	24W	30W	30W	24W
Driving Method				constant voltage		

### Sposób łączenia / Wires & series connection length

Wires	Input end connect two-core RVV red and black wire, Red:VI+; Black:VI-
Stand Length In Serial Connection	5M
Maximum Length In Serial Connection	≤5M

### Parametry zewnętrzne / Outer parameters

Shell	/
Dimension	5000*10*3mm
Color	Yellow


## Fixed mode

Screw /  
 Double-sided adhesive 5000\*10mm, 3M double-sided adhesive

## Environment parameters

Working Temperature -40°C—60°C  
 Storage Temperature -50°C—80°C  
 IP Degree IP64

## Wymiary / Dimension (Unit: mm )

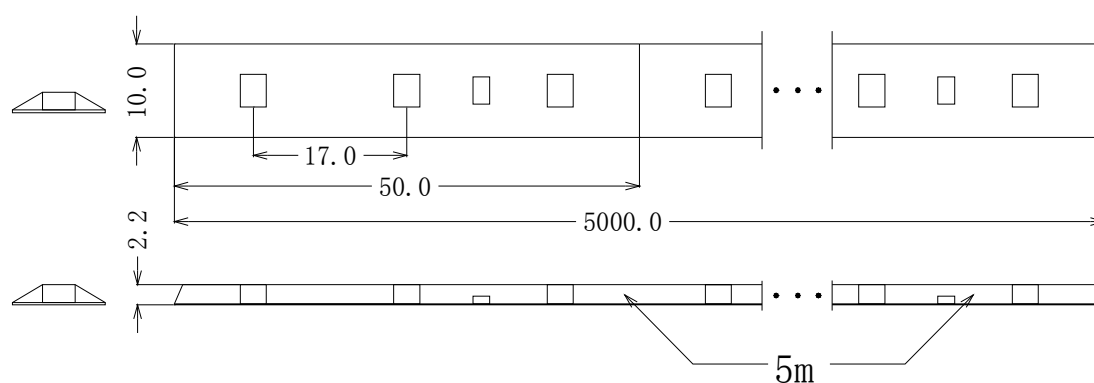

## Sposób połączenia / Connection diagram

