

Wodoodporna Taśma LED Flexible LED Ribbon

- 60led/m; 300led/5m 60Wat/5m
- kolory: biały, biały ciepły, czerwony, zielony, niebieski, żółty
- 5 metrów na rolce
- rozmiar LED 5050



Parametry / Specifications

LED Type	5050 SMD LED				
Available Color	R/G/B/Y/W/CW				
Angle(2θ _{1/2})	≥140°				
Luminous Flux (lm)					
Red Light	Green Light	Blue Light	Yellow Light	White Light	Warm White
1050	1050	1050	1050	3000	3000
Wavelength Scope (nm/K)					
Red Light	Green Light	Blue Light	Yellow Light	White Light	Warm White
619~635	512~528	463~475	584~595	5500-6500	2700-3500
LED Qty	300pcs				
Life Span	50, 000h				



RoHS



Parametry elektryczne / Electrical parameters

Working Voltage	DC12V
Working Current	5 A

Power : 60W

Driving Method constant voltage

Sposób łączenia / Wires & series connection length

Wires	Input end connect two-core RVV red and black wire, Red:VI+ ;Black:VI-
Stand Length In Serial Connection	5M
Maximum Length In Serial Connection	≤5M

Parametry zewnętrzne / Outer parameters

Shell	/
Dimension	5000*10*2,5mm
Color	Yellow


Fixed mode

Screw	/
Double-sided adhesive	5000*10mm,3M double-sided adhesive

Enviroment parameters

Working Temperature	-40°C—60°C
Storage Temperature	-50°C—80°C
IP Degree	IP33

Wymiary / Dimension (Unit: mm)

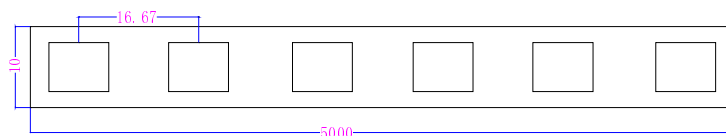

Sposób połączenia / Connection diagram

